

## Technical Product Information

### Dragon 421

# Dragon 421 - Discs Ø150 mm 15 h QG

## Recommended application

Sanding of wood, paint, filler, car body, PVC





## Variations

Discs Ø150 mm QG: 15 h



Also available with 0 h, 6 h, 9 h, 17 h, 49 h, and 8mm-hole with 6 slits

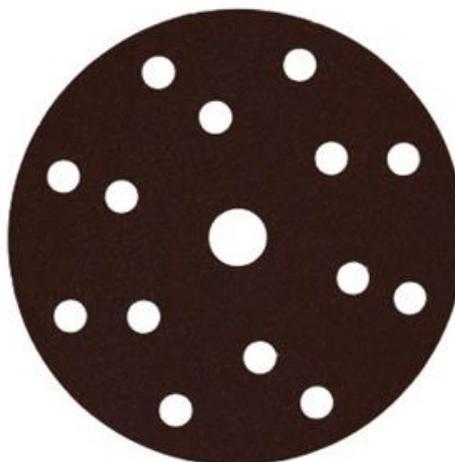

### Grain type

	<b>WA</b>	White aluminium oxide
<b>X</b>	<b>HA</b>	Hardened (blue-fired) brown aluminium oxide
	<b>BA</b>	Brown aluminium oxide
	<b>S</b>	Silicium carbide
	<b>ZA</b>	Zirconia alumina
	<b>C</b>	Ceramic

### Topcoat

	<b>ST</b>	Stearate
--	-----------	----------

### Grit range

P12	P16	P24	P30	P36	P40	P50	P60	P80	P100	P120	P150	P180	P220	P240	P280	P320	P360	P400	P500	P600	P800	P1000	P1200	
					<b>X</b>		<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>		<b>X</b>										

### Dimension with & without centre holes

125mm	150mm	178mm	203mm	225mm	330mm	375mm	406mm	430mm	450mm	500mm	600mm
	<b>X</b>										

### Grain distribution

	●	Close
<b>X</b>	◐	Semi open
	○	Open

### Bonding

<b>X</b>	<b>QQ</b>	Resin/resin
	<b>SQ</b>	Starch/resin
	<b>BQ</b>	Flexible resin/resin
	<b>SS</b>	Starch/starch

### Back side

<b>X</b>	<b>QG</b>	Quick Grip
	<b>FL</b>	Felt

### Backing

	<b>A</b>	<80 g/m <sup>2</sup> paper
	<b>B</b>	80-100 g/m <sup>2</sup> paper
	<b>C</b>	105-125 g/m <sup>2</sup> paper
	<b>D</b>	130-170 g/m <sup>2</sup> paper
<b>X</b>	<b>E</b>	220 g/m <sup>2</sup> paper
	<b>F</b>	>300 g/m <sup>2</sup> paper (reinforced)
	<b>WR</b>	100 -115 g/m <sup>2</sup> water resistant
	<b>WL</b>	120 g/m <sup>2</sup> light water resistant